

Globe Replacement Instructions for a Sani 18/55/220 (Pictures are of the Sani 55)


NEVER SWITCH THE UNIT ON WITH THE COVER REMOVED.

NEVER LOOK DIRECTLY INTO THE LAMPS!


1. **Switch the power OFF!**
2. The lamp/s (globe/s) can be changed with the unit hanging on the wall, but we have placed the **Sani 55** on a table for this procedure.




3. You will need a flat screw driver to remove the two self tapping screws at the top of the unit (*Fan Side*).

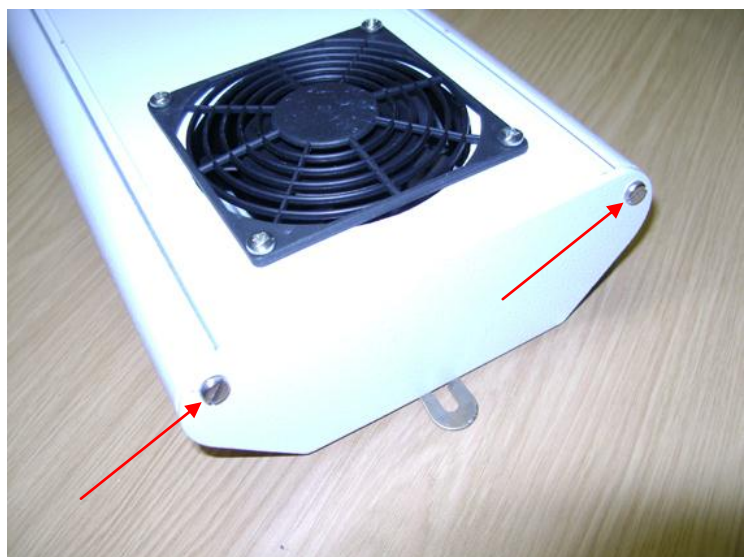

4. Remove the cover plate and place it on the side.

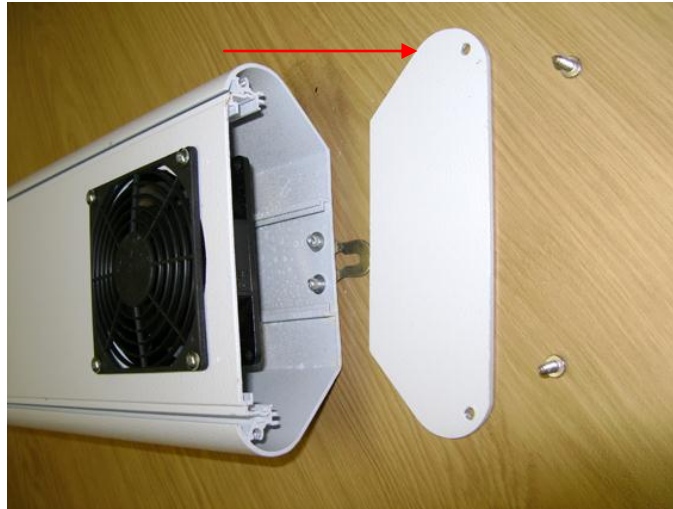


5. Carefully lift out the moulded plate with the fan. (Do not drop it into the unit as it may break a lamp that is already in the unit.)

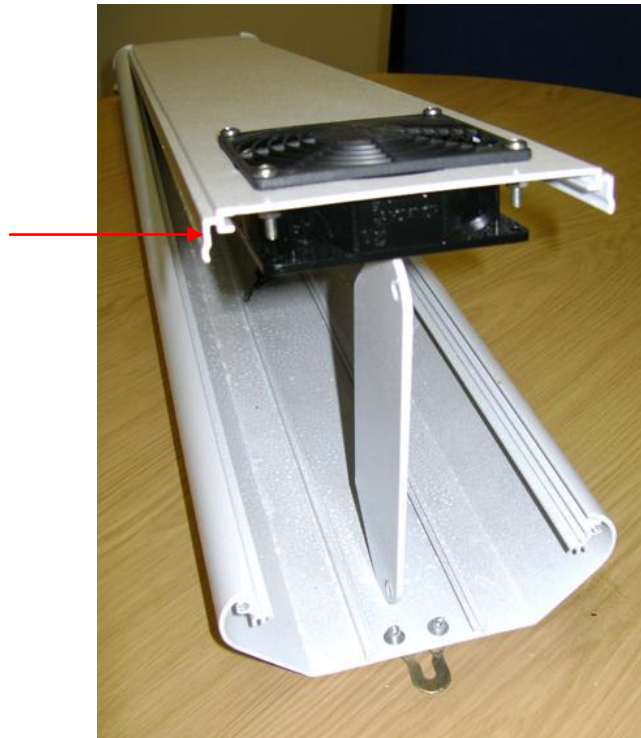


6. Place the plate with the fan next to the unit. (The fan has wires attached to the electronics. If this process is performed with the unit on the wall the wires might tear out!)




7. The opposite end to the fan will have the lamp holder (A) and lamp retaining clip (B) fitted.

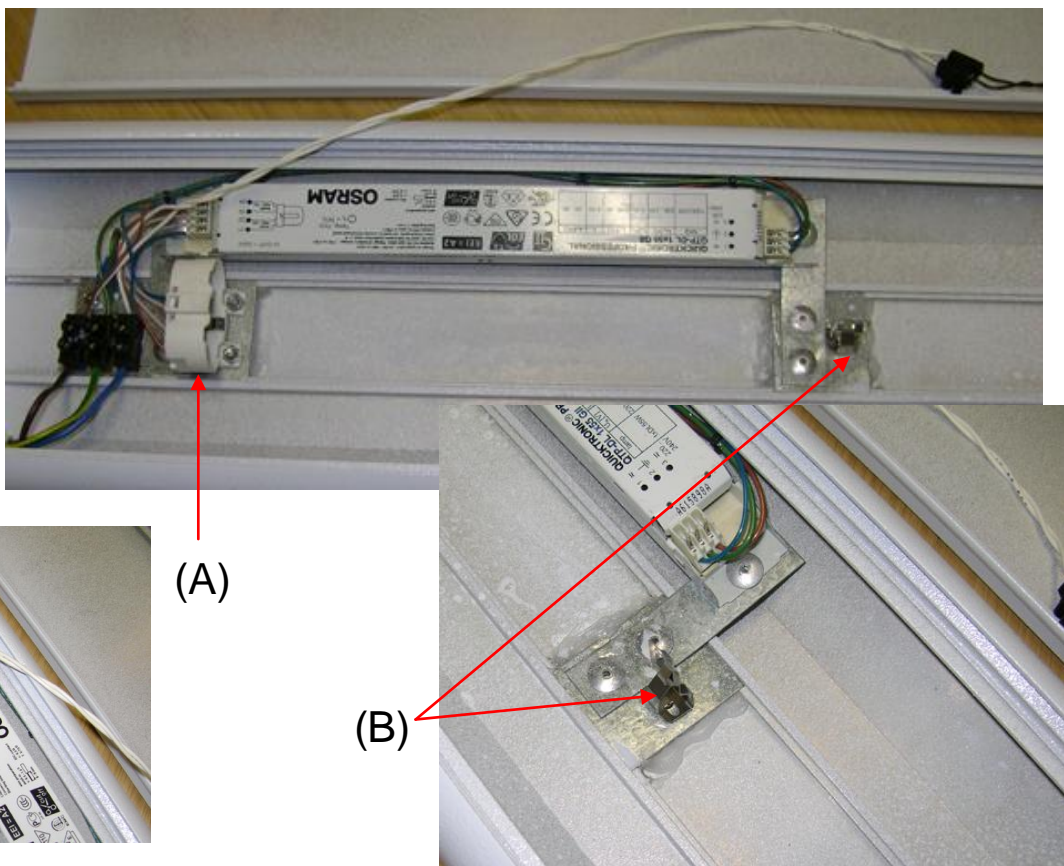

8. Insert the lamp into the lamp holder, while holding it up at an angle so as not to touch the retaining clip.

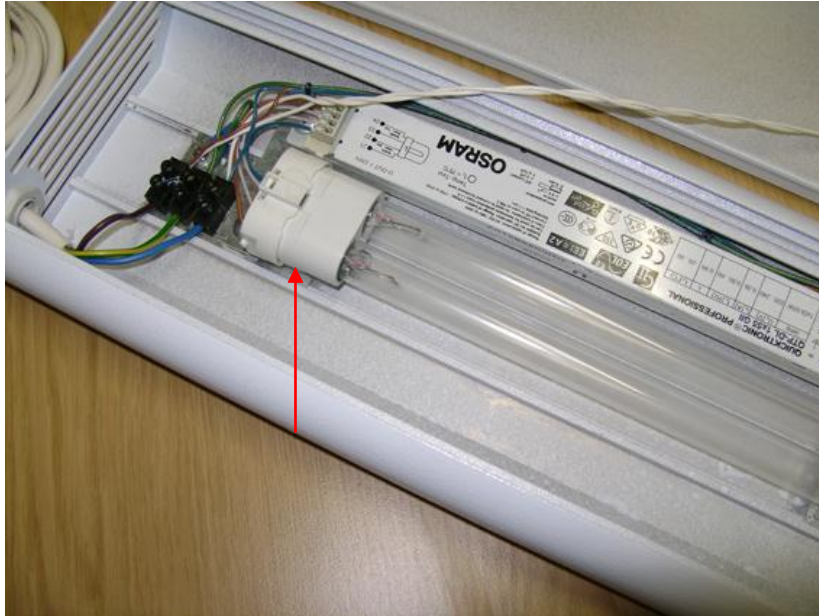

9. Gently push the lamp over the lamp retaining clip. **Be careful not to exert too much pressure, otherwise the globe will crack!**

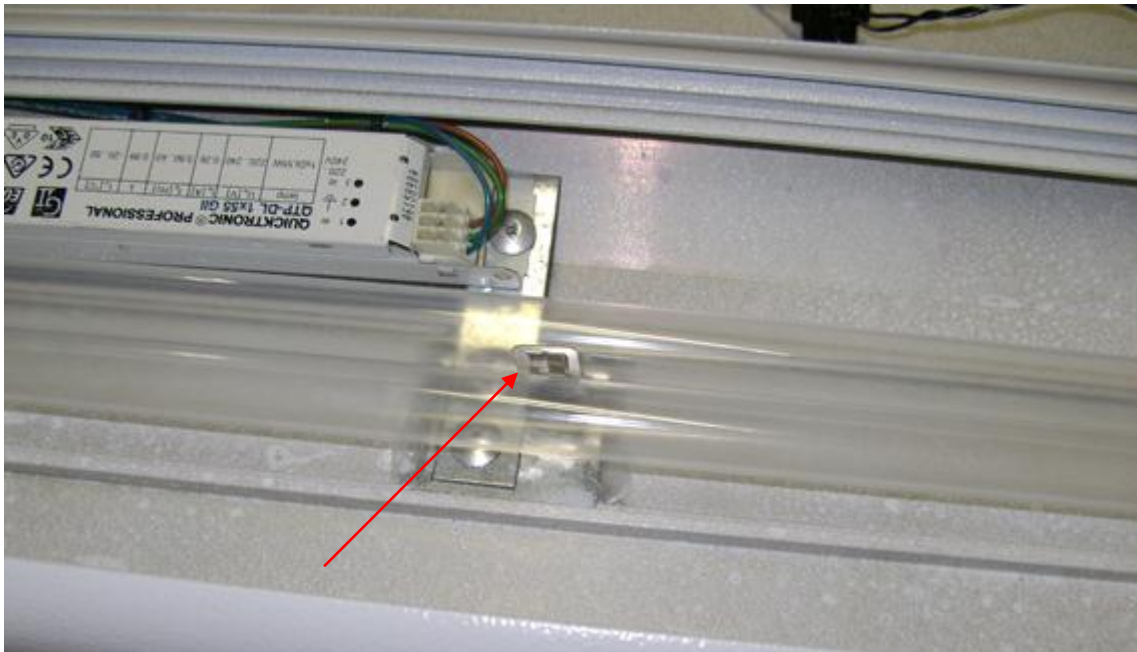

10. Once the globe is in place the unit can be re-assembled.



11. Replace the cover plate with the fan. Make sure it clicks into place correctly.
12. Hold the small cover plate with the two screw holes in place and replace the two (2) self tapping screws.
13. Hang the unit back in place.
14. Switch the power back on and then unit is ready for use again.

**NEVER SWITCH THE UNIT ON WITH THE COVER REMOVED.
NEVER LOOK DIRECTLY INTO THE LAMPS!**